

## 1 Introduction

In this project you will investigate the production of x-rays and their interactions with matter using the Monte Carlo method. This is a technique for simulating processes using sequences of random numbers. The first part of the problem is to simulate the production of individual photons, each having a different energy. The energies are chosen ‘at random’ in such a way that the values follow a given distribution.

We then allow each photon to hit a layer of matter (in the example below, 1 mm beryllium). There is a certain probability for the photon to be absorbed, and this probability depends on the photon’s energy. So for each photon we ‘toss a coin’ (in the computer, of course) to decide whether the photon makes it through. We can then make a histogram of the energies of the photons which penetrate the layer.

## 2 The assignment

Your assignment is to simulate the production of x-ray photons from a synchrotron radiation source and to simulate their passage through a layer of matter. The tasks include the following:

- simulate random numbers uniformly distributed between 0 and 1;
- use the uniformly distributed numbers to simulate photon energies using the acceptance–rejection technique;
- simulate the absorption of photons in matter;
- make a histogram of the energies of the photons which are not absorbed.

## 3 Generating random numbers

Simulation of random processes by the Monte Carlo method can be broken down into two basic steps. First, random numbers are generated which follow a uniform distribution between 0 and 1. Next, these are used to generate random numbers which correspond to physical quantities (such as photon energies), which in general have a different frequency distribution.

There are many computer algorithms available for producing uniformly distributed random numbers. They produce a sequence of numbers according to a certain rule, and would produce the same sequence if you repeat the procedure. In this sense they are not truly random, and therefore are often called pseudorandom. For our purposes this is just as good.

A simple but effective algorithm is the multiplicative linear congruential generator (MLCG). This generates a sequence of integer values  $n_1, n_2, \dots$  according to the rule

$$n_{i+1} = (an_i) \bmod m. \tag{1}$$

Here the *multiplier*  $a$  and *modulus*  $m$  are integer constants and the mod (modulo) operator means that you take the remainder of  $an_i$  divided by  $m$ . The values  $n_i$  follow a periodic sequence in the range  $[1, m - 1]$ . The initial value  $n_0$  is called the *seed*. The transformation

$$r_i = n_i/m \tag{2}$$

then gives numbers in the interval  $(0, 1)$ .

The art of random number generation is to choose  $a$  and  $m$  so that the resulting values  $r$  perform well in various tests of randomness. For a 32-bit integer representation, for example,  $m = 2147483399$  and  $a = 40692$  have been shown to give good results.<sup>1</sup> You may wish to try implementing your own random number generator. If time constraints prevent this you can use a commercially available generator from a program library.

## 4 X-ray photons from synchrotron radiation

When a charged particle such as an electron traverses a magnetic field, it emits electromagnetic radiation (photons) tangential to its direction of motion. The energy spectrum of these photons has a certain derivable form which depends on the electron's energy and the strength of the magnetic field. This is difficult to calculate, but fortunately we don't have to; spectra can be obtained from the Center for X-ray Optics at the Lawrence Berkeley National Laboratory at <http://www-cxro.lbl.gov/>. Follow the links to 'x-ray interactions with matter', and then 'synchrotron bend magnet radiation'. You can choose various parameters for the electron beam to produce energy spectra such as the one shown in Fig. 1. The data can be downloaded into a file for use in your project.

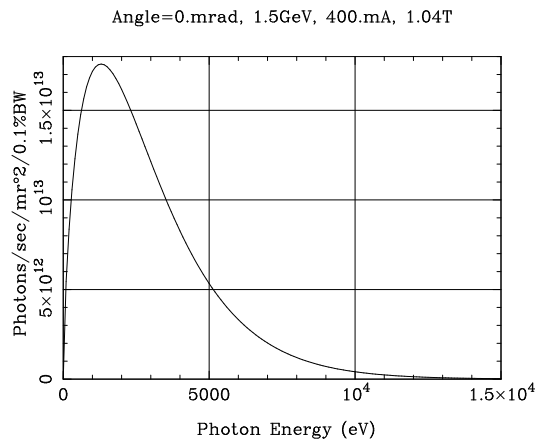


Figure 1: A photon energy spectrum from a synchrotron radiation source.

Once you have obtained a spectrum like Fig. 1, the next step is to generate photon energies such that the probability to obtain a given energy is proportional to the height of the curve. The easiest way to do this is with the *acceptance-rejection* technique.

---

<sup>1</sup>P.L. L'Ecuyer, Efficient and portable combined random number generators, *Commun. ACM* **31** (1988) 742.

- First generate two independent random numbers,  $r_1$  and  $r_2$ , both uniformly distributed between 0 and 1.
- Use  $r_1$  and  $r_2$  to produce two more numbers:  $E = r_1 E_{\max}$  and  $f = r_2 f_{\max}$ , where  $E_{\max}$  is the maximum photon energy and  $f_{\max}$  is at least as high as the maximum of the energy spectrum. For Fig. 1, for example, use  $E_{\max} = 1.5 \times 10^4$  and  $f_{\max} = 1.8 \times 10^{13}$ . The two numbers  $E$  and  $f$  will be represented by a point somewhere on the energy spectrum plot.
- If the point  $(E, f)$  is below the curve, accept  $E$  as the generated photon energy, otherwise, reject the value and repeat the procedure until a value is accepted.

The probability to accept the point is proportional to the height of the curve, so the accepted energies will have the desired distribution.

## 5 Interaction of x-rays with matter

We will imagine that the x-rays hit a layer of material of a given thickness  $x$ . We would like to know how many of the photons make it out the other side and what their energies are. The probability for a photon to be absorbed by the photoelectric effect before penetrating a distance  $x$  can be expressed as

$$P(\gamma \text{ of energy } E \text{ absorbed before } x) = 1 - e^{-x/\lambda(E)} \quad (3)$$

where  $\lambda(E)$  is the attenuation length, which is in general a complicated function of the photon's energy. Attenuation lengths measured as a function of energy can be downloaded from the Center for X-ray Optics for a variety of materials; an example for beryllium is shown in Fig. 2. (Follow the links 'x-ray interactions with matter', 'attenuation length'.)

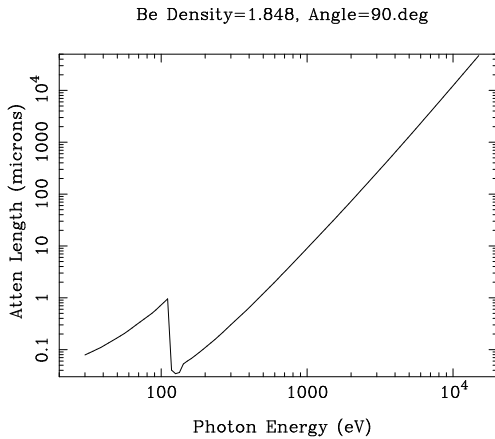


Figure 2: Attenuation length for x-rays in beryllium as a function of energy.

The strategy is thus to start by generating a photon with a certain energy. For this energy, determine the attenuation length  $\lambda(E)$  and from (3) the probability  $P$  for the photon to be absorbed before making it through a given thickness of material, e.g.  $x = 1$  mm beryllium. Then generate another random number  $r$  between 0 and 1. If  $r < P$ , we say that the photon

is absorbed, if not, it makes it through. (In fact, a real photon may make it through but its energy can be degraded by Compton scattering. For now we will ignore this effect.)

You will then have a subset of the photons which make it through the layer of material, and you should make a histogram of their energies. Generate enough events so that the energy spectrum of the photons getting through is reasonably well determined.

Should time permit, try varying the parameters of the problem such as the thickness of the material layer, its composition, the nature of the photon source, etc.

## 6 References

X-ray data can be obtained from the web site of the Center for X-ray Optics at the Lawrence Berkeley National Laboratory: <http://www-cxro.lbl.gov/>.

The Monte Carlo method is described in:

S. Brandt, *Statistical and Computational Methods in Data Analysis*, Springer, New York (1997);

L. Lyons, *Statistics for Nuclear and Particle Physicists*, Cambridge University Press, Cambridge (1986);

G. Cowan, *Statistical Data Analysis*, Clarendon Press, Oxford (1998).